





# 113 Master Trax™



## Standard colours:

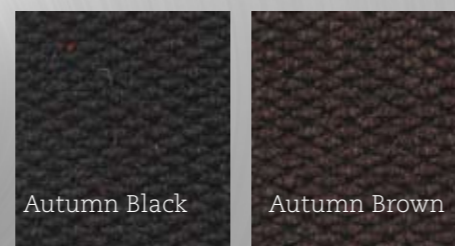

## Special colours:

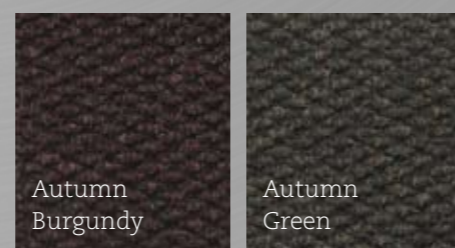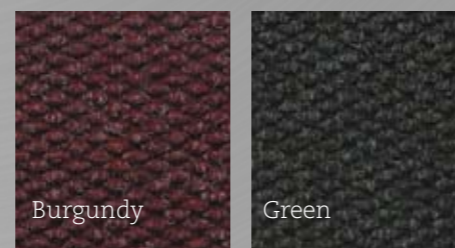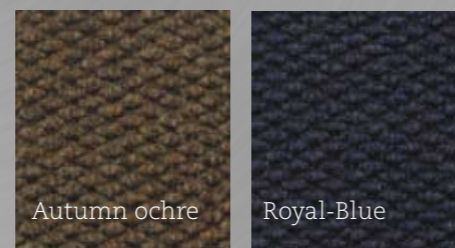

- Durable carpet flooring, designed for large indoor entrance areas, including wall-to-wall applications. Offers many possibilities for creative combinations that will allow the entrance become part of the complete interior design.
- Unsurpassed ability to retain moisture and scrape debris from foot traffic while maintaining its great looking appearance for the longest time.
- Mold and mildew resistant, UV stabilized, crush resistant and remains unaffected by climate extremes.
- Suitable for even the heaviest of traffic conditions.
- For placement inside entrances or outside if not exposed to rain.
- In recess frames (depth 10 mm) or wall to wall installations in shopping malls, airports, hospitals, hotel lobbies, banks, restaurants, golf facilities (spikes resistant), fitness centers, elevators, locker rooms, ski lodges, skating rinks, automobile showrooms, any public or professional building.
- Available in tiles of 50 cm x 50 cm, in charcoal and with bitumen backing.
- Vacuum/shampooing or use extraction method to clean.

# 113 Master Trax™

PRODUCT SPECIFICATIONS			
Designation	Dust Control Matting		
Description	Absorbent / scrape carpet mat		
Material			
	Top	Nibbed needle punched carpet consisting of anti-static 100% polypropylene fibers. 1700 grams of yarn per m <sup>2</sup>	
	Backing	Synthetic rubber (rolls), bitumen (tiles)	
Process	Non woven/Needle punched		
Category	Indoor absorbent - Contract		
Recommended use	Indoor - heavy traffic areas - recess frames, wall to wall, finished mat		
Standard colours	Blue, Brown, Charcoal, Red, Natural, Grey, Autumn Black, Autumn Brown		
Special colours	Autumn Ochre , Royal-Blue, Burgundy, Green, Autumn Green, Autumn Burgundy		
Weight	3.2 kg/m <sup>2</sup>		
Thickness	11 mm		
Standard sizes	Full rolls: 200 cm x 21 m Tiles: 50 cm x 50 cm		
Custom sizes	200 cm per linear meter		
Special remarks	Crush resistant and unaffected by climate extremes. Mold/mildew resistant Easy to install, can be cut to any size or shape without edge ravel.		
PRODUCT TESTING			
Tests	Norms	Results	
Abrasion resistance	ASTM D3884		
Colour fastness to light	AATCC 16E		
Accelerated wear test by sim floor machine	U.S.		
Accelerated soiling	U.S.		
Anti-slip	DIN51130 BGR181		
Water retention	U.S.	4 l/m <sup>2</sup>	
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09	
FIRE TESTING			
	Surface Flammability	ASTM D2859	Pass
	Classification of the reaction to fire performance	DIN EN 13501-1	
	Russian fire retardancy test	CCPB.NLOP-019.B01723	Pass
Sustainability	<ul style="list-style-type: none"> <li>• Recyclable materials</li> <li>• REACH compliant ( Registration, Evaluation, Authorization and restrictions of Chemicals)</li> <li>• Contributes to cleaner environment by reducing need of cleaning chemicals</li> </ul>		